

A-1



TOOL

1. Hex Key
2. Wrench
3. 24mm Hex wrench
4. 14mm Hex wrench
5. Special tool (M5GAC616)
6. Screwdriver
7. T shape hex wrench
8. Gel

A-2



Use screwdriver to loosen the screw on the lockout Knob.

(FOR ALL)

A-3



Remove the Knob , detent ball and detent spring.

(FOR ALL)

A-7



Remove the Lockout assembly.

(FOR OMEGA.GILA-PRO.)
(GILA.VITA.NEON.)

A-8



Use Special tool (M5GAC616) to loosen the spring top cap.

(FOR OMEGA.GILA-PRO.)
(GILA.VITA.NEON.)

A-9



Remove the spring assembly.

(FOR OMEGA.GILA-PRO.)
(GILA.VITA.NEON.)


A-4



1. Lockout Knob.
2. 2 detent ball
3. 2 detent spring
4. Screw

(FOR ALL)

A-5

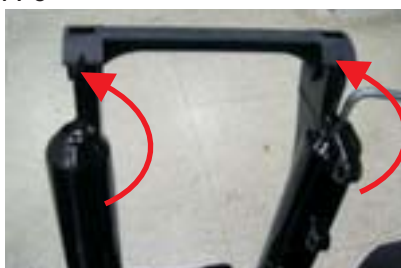

Use 4mm Hex key by turning counter clock-wise to loosen the bolt on the bottom of the fork.

(FOR OMEGA.GILA-PRO.)
(GILA.VITA.NEON.)

A-6



Use 24mm Hex Wrench to loosen the Lockout top cap.

(FOR OMEGA.GILA-PRO.)
(GILA.VITA.NEON.)

A-10



Separate the Crown assy. From the outer casting.

(FOR OMEGA.GILA-PRO.)
(GILA.VITA.NEON.)

A-11



Use Special tool (M5GAC616) to loosen the spring top cap.

(FOR)
(TR-PRO.SOFI.TRENDY.)

A-12



Remove the spring assembly.

(FOR)
(TR-PRO.SOFI.TRENDY.)

A-13



Use 5mm T shape Hex wrench by turning counter clock-wise to loosen the compression rod.

(FOR)
(TR-PRO.SOFI.TRENDY.)

A-14



Use 24mm Hex Wrench to loosen the Lockout top cap.

(FOR)
(TR-PRO.SOFI.TRENDY.)

A-15



Push the Crown down, remove the lockout assembly.

(FOR)
(TR-PRO.SOFI.TRENDY.)

A-19



Use 14mm long Hex wrench by turning counter clock-wise to loosen the lockout assembly.

(FOR)
(TR-PRO.SOFI.TRENDY.)

A-20



Remove the lockout assembly.

(FOR)
(TR-PRO.SOFI.TRENDY.)

A-21



Remove the bumper and spacer.

(FOR ALL)

A-16



Use a 24mm Hex Wrench by turning counter clock-wise to loosen the top cap.

(FOR)
(TR-PRO.SOFI.TRENDY.)

A-17



Separate the Crown assy. From the outer casting.

(FOR)
(TR-PRO.SOFI.TRENDY.)

A-18



Use a long 14mm Hex wrench.

(FOR)
(TR-PRO.SOFI.TRENDY.)

A-22



Remove the compression rod from the top of the inner leg.

(FOR ALL)

A-23



This is the photos after disassembly the fork.

(FOR OMEGA.GILA-PRO.)
(GILA.VITA.NEON.)

A-24



This is the photos after disassembly the fork.

(FOR)
(TR-PRO.SOFI.TRENDY.)

RST

2008

Assemble

OMEGA.GILA-PRO.GILA.VITA.
NEON.TR-PRO.SOFI.TRENDY.
TNL

B-1



Install the compression rod.

(FOR OMEGA.GILA-PRO.)
(GILA.VITA.NEON.)

B-2



Install the bumper & spacer into the compression rod.

(FOR OMEGA.GILA-PRO.)
(GILA.VITA.NEON.)

B-3



Install the spring assembly.

(FOR OMEGA.GILA-PRO.)
(GILA.VITA.NEON.)

RST

2008

Assemble

OMEGA.GILA-PRO.GILA.VITA.
NEON.TR-PRO.SOFI.TRENDY.
TNL

B-7



Install the lockout assembly.

(FOR OMEGA.GILA-PRO.)
(GILA.VITA.NEON.)

B-8



Use 24mm Hex wrench by turning clock-wise to tighten the lockout assembly.

(FOR OMEGA.GILA-PRO.)
(GILA.VITA.NEON.)

B-9



Use 4mm Hex wrench by turning clock-wise to tighten the bolt on the bottom of the legs.

(FOR OMEGA.GILA-PRO.)
(GILA.VITA.NEON.)

RST

2008

Assemble

OMEGA.GILA-PRO.GILA.VITA.
NEON.TR-PRO.SOFI.TRENDY.
TNL

B-4



Use the special tool by turning clock-wise to tighten the top cap.

(FOR OMEGA.GILA-PRO.)
(GILA.VITA.NEON.)

B-5



Install the crown assembly into the casting.

(FOR OMEGA.GILA-PRO.)
(GILA.VITA.NEON.)

B-6



Use the cap to adjust the lockout assembly by turning clock-wise to unlock the assembly.

(FOR OMEGA.GILA-PRO.)
(GILA.VITA.NEON.)

RST

2008

Assemble

OMEGA.GILA-PRO.GILA.VITA.
NEON.TR-PRO.SOFI.TRENDY.
TNL

B-10



Install Lockout assembly.

(FOR)
(TR-PRO.SOFI.TRENDY.)

B-11



Use long 14mm Hex wrench.

(FOR)
(TR-PRO.SOFI.TRENDY.)

B-12



Use above long 14mm Hex wrench by turning clock wise to tighten the lockout assembly.

(FOR)
(TR-PRO.SOFI.TRENDY.)

B-13



Install the compression rod.

(FOR)
(TR-PRO.SOFI.TRENDY.)

B-14



Install the bumper & spacer into the compression rod.

(FOR)
(TR-PRO.SOFI.TRENDY.)

B-15



Install the crown assembly into the casting.

(FOR)
(TR-PRO.SOFI.TRENDY.)

B-19



Tighten the lockout assembly.

(FOR)
(TR-PRO.SOFI.TRENDY.)

B-20



Use 24mm Hex wrench by turning clock-wise to tighten the lockout assembly.

(FOR)
(TR-PRO.SOFI.TRENDY.)

B-21



Install the spring assembly.

(FOR)
(TR-PRO.SOFI.TRENDY.)

B-16



Use T shape 5mm Hex wrench by turning clock-wise to tighten the compression rod.

(FOR)
(TR-PRO.SOFI.TRENDY.)

B-17



Use the cap to adjust the lockout assembly by turning clock-wise to unlock the assembly.

(FOR)
(TR-PRO.SOFI.TRENDY.)

B-18



Use the loctite on the hex of the lockout assembly.

(FOR)
(TR-PRO.SOFI.TRENDY.)

B-22



Use the special tool by turning clock-wise to tighten the top cap.

(FOR)
(TR-PRO.SOFI.TRENDY.)

B-23



1. Lockout Knob.
2. 2 detent ball
3. 2 detent spring
4. Screw

(FOR ALL)

B-24



Use the Knob by turing counter clock-wise in lockout position.

(FOR ALL)

B-25



Install the Knob and the Lever face 1~2 clock position.

(FOR ALL)

B-26



Install the detent spring and detent ball.

(FOR ALL)

B-27



Turn the Knob half cycle then tighten the screw on.

(FOR ALL)