



- TOOL
1. Hex Key
2. Special tool

(FOR CAPA.191.777.)




Remove the top cap.

(FOR CAPA.191.777.)



Use 4mm Hex Key by turning counter clock-wise to loosen the bolt on the bottom of the fork.

(FOR CAPA.191.777.)

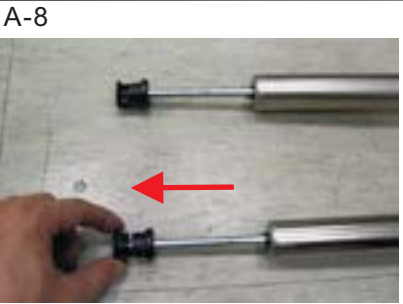

Remove the spacer & bumper.

(FOR CAPA.191.777.)



Separate the Crown assy. From the outer casting.

(FOR CAPA.191.777.)



Remove the compression rod from the top of the leg.

(FOR CAPA.191.777.)



Use special tool by turning counter clock-wise to loosen the top cap.

(FOR CAPA.191.777.)




This is the parts after disassembly the fork.

(FOR CAPA.191.777.)



Remove the spring assembly.

(FOR CAPA.191.777.)

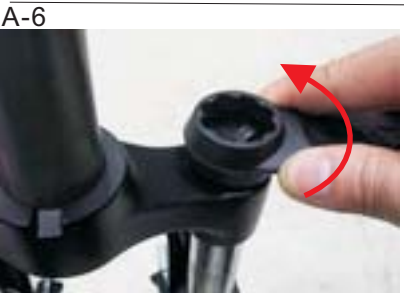

(FOR CAPA.191.777.)

A-11



1. Hex Key
2. Special tool
3. T shape tool

(FOR 790.)

A-12



Use special tool by turning counter clock-wise to loosen the top cap.

(FOR 790.)

A-13



Remove the top cap and spring assembly.

(FOR 790.)

A-17



Remove the compression rod from the top of the leg.

(FOR 790.)

A-18



This is the parts after disassembly the fork.

(FOR 790.)

A-14



Use T shape tool by turning counter clock-wise to loosen the assembly.

(FOR 790.)

A-15



Separate the Crown assy. From the outer casting.

(FOR 790.)

A-16




Remove the bumper from the compression rod.

(FOR 790.)

RST
2008

Assemble
CAPA.191.777.790.
C8

B-1



Install the compression rod into the inner leg.

(FOR CAPA.191.777.)

B-2



Install the bumper & spacer into the compression rod.

(FOR CAPA.191.777.)

B-3



Install the top cap and spring assembly into the leg.

(FOR CAPA.191.777.)

RST
2008

Assemble
CAPA.191.777.790.
C8

B-4



Use special tool by turning clock-wise to tighten the adjuster.

(FOR CAPA.191.777.)

B-5



Install the crown assembly into the casting.

(FOR CAPA.191.777.)

B-6



Use 4mm Hex Key to tighten the bolt on the bottom of the fork .
(For both side)

(FOR CAPA.191.777.)

RST
2008

Assemble
CAPA.191.777.790.
C8

RST
2008

Assemble
CAPA.191.777.790.
C8



Assemble

CAPA.191.777.790.

C8



(FOR 790.)



(FOR 790.)



(FOR 790.)



Assemble

CAPA.191.777.790.

C8



(FOR 790.)



(FOR 790.)



(FOR 790.)



Assemble

CAPA.191.777.790.

C8