


2002

SEATPOST


OWNER'S MANUAL



Mountain and Road Post Bumper Specification (mm)

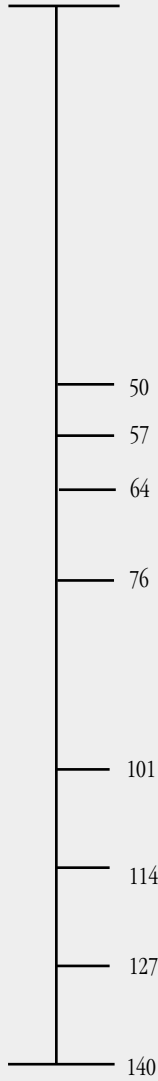

Congratulations! You have the best in suspension components on your bicycle! This manual contains important information about the safe operation and maintenance of your shock. To ensure that your RockShox shock performs properly, we recommend that you have your fork installed by a qualified bicycle mechanic. We also urge you to follow our recommendations to help make your bicycling experience more enjoyable and trouble-free.

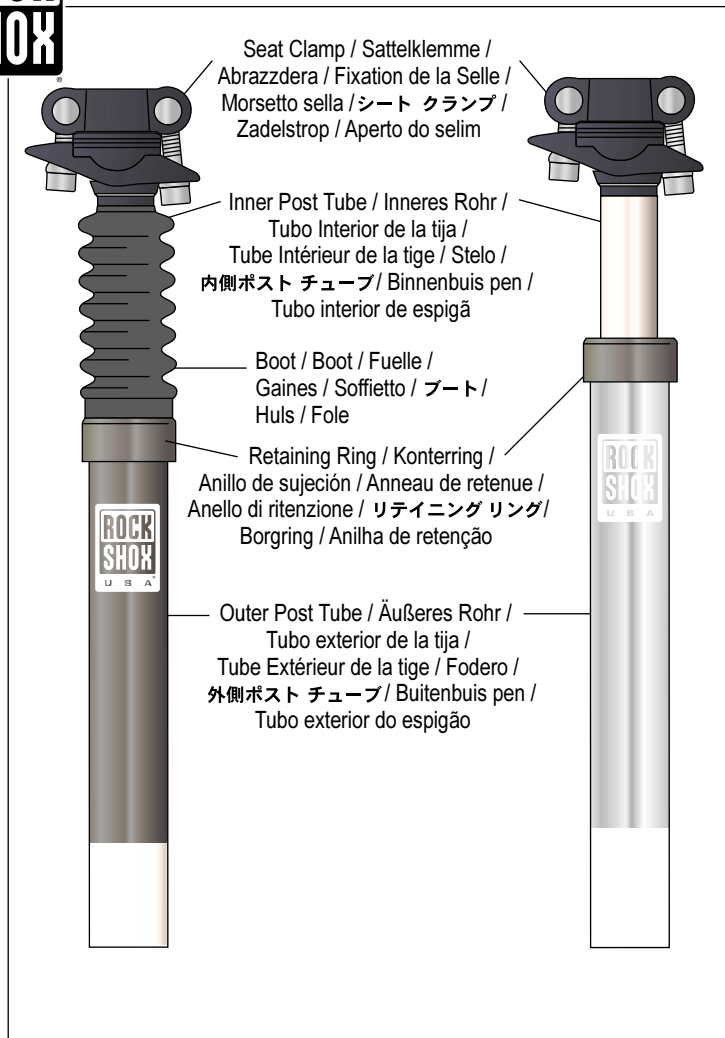

NOTE: YOUR PRODUCT'S APPEARANCE MAY VARY FROM THE ILLUSTRATIONS/PHOTOS IN THIS MANUAL. FOR THE LATEST INFORMATION ABOUT YOUR PRODUCT VISIT OUR WEBSITE AT WWW.ROCKSHOX.COM.

IMPORTANT

Consumer Safety Information

RIDING A BIKE IS DANGEROUS. NOT PROPERLY MAINTAINING OR INSPECTING YOUR BIKE IS EVEN MORE DANGEROUS. IT IS ALSO DANGEROUS NOT TO READ THESE INSTRUCTIONS.

1. Do not ride with the seat post above the maximum height/minimum insertion mark indicated on the post. Do not scratch the post to mark your preferred seat height, instead, use a piece of tape.
2. Before each ride be sure the seat post binder bolt is securely tightened to the proper torque. Not securing the bolt can cause serious and/or fatal injuries. Follow the bicycle manufacturer's specification for binder bolt torque.
3. Always use genuine RockShox parts. Use of other aftermarket replacement parts voids the warranty and could cause structural failure to the seat post.

INSTALLATION

It is extremely important that your RockShox Seat Post is installed correctly by a qualified mechanic with proper tools.

- Use a file to deburr the inside of the bicycle frame's seat tube. Scoring or scratches to the inner seat tube may cause premature failure.
- Clean and grease the bicycle frame's seat tube. If using a seat post shim, grease the inside and outside of it as well.
- Install the seat post. Tighten the binder bolt on your bicycle to the manufacturer's specifications.

Saddle Installation

1. Remove front and rear clamp screws from post clamp assembly.
2. Remove the upper clamp assembly and grease the lower clamp surface, clamp, washers, clamp screws and seat clamp pins (fig. 1).
3. Install saddle and insert upper assembly through the rear of the saddle rails.
4. Hand tighten clamp screws and set saddle to center.
5. Tighten front and rear clamp screws with the saddle in its preferred position. Torque the clamp screws to 72 to 120 in-lb. (8.1 to 13.4 Nm)
6. Take a ride and check if the saddle feels comfortable. If adjustment is necessary, proceed to the next section, "Tuning."

NOTE: DO NOT OVER-TIGHTEN CLAMP SCREWS! WHEN ADJUSTED CORRECTLY, MAKE SURE CLAMP SCREWS PROTRUDE FROM THE SEAT CLAMP PINS. IF THE SCREWS DO NOT PROTRUDE FROM THE SEAT CLAMP PINS, YOU SHOULD USE LONGER SCREWS.

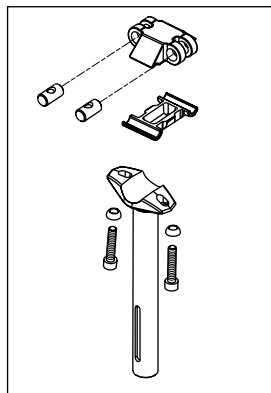


Fig. 1

PERFORMANCE TUNING

RockShox Seat Posts can be tuned to your particular weight, riding style, and the terrain you ride on. Using a medium bumper, our Seat Posts are set up for the 150 to 180 lb. (68 to 81 kg), all-around rider. You may benefit from making tuning adjustments for your specific needs. Install the post and take your bicycle for a ride before making any tuning adjustments. When tuning suspension, always make one change at a time and write it down. Keeping a record lets you know what changes you have tried and suggests what changes you might try.

Setting Sag

The RockShox Seat Post is designed to compress (sag) when you are sitting on the bike. The optimum settings for the best all around performance are 0 to 20mm sag for the MTB Post and 0 to 8mm sag for the Road Post. To measure sag, pull the dust boot up from the bottom and install a zip tie on the inner tube so that it is flush against the retaining ring; sit on the bike in a normal riding position; then step off your bike and measure the bottom of the zip tie to the top of the retaining ring. This measurement is the amount of sag.

NOTE: BE SURE TO REMOVE THE ZIP TIE WHEN YOU ARE FINISHED MEASURING SAG.

Changing the preload alters the sag and firmness of the initial post movement. The preload adjuster plug in the bottom of the seat post tube adjusts the sag of the post (preload on the spring stack). When the preload adjuster is turned clockwise, the seat post will sag less and be firmer. Turning the preload adjuster plug counterclockwise causes the seat post to be softer and sag more. Do not turn the preload adjuster plug exposing its threads at the bottom of the post tube. Failure to observe this instruction could result in premature failure of the preload adjuster plug or outer tube.

Changing the Spring Rate

Spring rate changes are made by cutting the bumper. The following are recommended elastomer lengths for rider weights.

MTB POST

If the sag setting is correct and you can't get a minimum travel of 20 mm, use a softer (longer) bumper. However, if the sag is correct and you have excessive bottom out, use a firmer (shorter) bumper. Use the chart below to determine what bumper is best suited for you.

Rider Weight	Bumper Length	Preload Spacers	Turns of Preload
100-160 lb	140mm	0	10-15
140-190 lb	127mm	1	10-25
170-220 lb	114mm	1	10-25
200-250 lb	101mm	1-2	10-30

Road Post

If the sag setting is correct and you can't get a minimum travel of 10 mm, use a softer (longer) bumper. However, if the sag is correct and you have excessive bottom out, use a firmer (shorter) bumper. Use the chart below to determine what bumper is best suited for you.

Rider Weight	Bumper Length	Preload Spacers	Turns of Preload
100-160 lb	76mm	2	5-10
140-190 lb	63mm	2-3	5-15
170-220 lb	57mm	3	5-20
200-250 lb	50mm	3	5-25

Changing the Bumper or Adding Preload Spacers

1. Unscrew the preload adjuster plug using a 6mm hex wrench (fig. 2).
2. Remove the bumper and any spacers from the outer tube. Note the orientation of all parts (fig. 2).
3. Cut the bumper, if necessary.
 - a. Using the gauge on the inside front cover, mark the desired length on the bumper with a felt tip pen.
 - b. With a razor knife or fine bladed saw, carefully cut the bumper making sure to cut the edge at a 90 degree angle (square).
4. Clean and grease the bumper and re-install into the outer tube with spacers (if used).
5. Re-install the cleaned and greased preload adjuster plug, starting threads by hand.
6. Tighten preload adjuster plug until it comes in contact with the bumper.
7. Add preload as necessary.

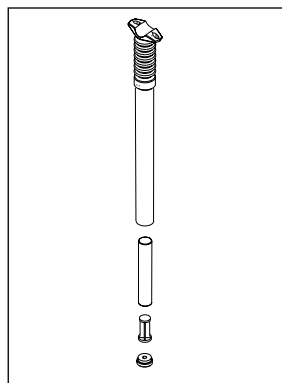


Fig. 2

MAINTENANCE

To maintain high performance, safety, and long life of your seat post, periodic maintenance is required. If you compete frequently or ride in wet, muddy or otherwise extreme conditions, reduce the suggested maintenance intervals listed below by 50 percent.

IMPORTANT: ALWAYS WEAR SAFETY GLASSES WHEN WORKING ON ROCKSHOX PRODUCTS.

Before Every Ride

- Check the rail clamp screws for proper torque.
- Check retaining ring to tightness.
- Check seat post binder bolt for proper torque according to the bicycle manufacturer's specifications.
- Check for play.

Torque Tightening Values

Clamp Screws 72 to 120in-lb (8.1 to 13.5Nm)

After 25 Hours Of Riding

- Disassemble the seat post. This procedure should be completed by a qualified mechanic with proper tools. The mechanic should clean the internal parts using a suitable solvent, inspect all parts for damage and replace any parts that are damaged.
- Lubricate the internal parts.
- Check for increased side to side movement. If after a fresh greasing there is still side-to-side movement, replace the keys. Contact your local dealer or distributor or visit our web site at www.rockshox.com for further information.

WARRANTY

RockShox, Inc. warrants its products for a period of one year from original date of purchase to be free from defects in materials or workmanship. Any RockShox product that is returned to the factory and is found by RockShox to be defective in materials or workmanship will be repaired or replaced at the option of RockShox, Inc. This warranty is the sole and exclusive remedy. RockShox shall not be held liable for any indirect, special, or consequential damages.

The warranty does not apply to products which have not been properly installed and adjusted according to RockShox installation instructions. The warranty does not cover any product that has been subject to misuse or whose serial number has been altered, defaced or removed. This warranty does not apply to damage to the product caused by a crash or abuse of the product or any other circumstances in which the product had be subjected to forces or loads beyond its design. This warranty does not cover paint damage or modifications to the product. **Proof of purchase is required.**

Warranty Repair

If for any reason it should be necessary to have warranty work done, return the product to a RockShox dealer. In the USA, dealers are required to call for a Return Authorization number (RA#) prior to returning product.

For more technical information, visit our web site at **www.rockshox.com**. For toll-free technical support in the USA, call 1.800.677.7177. Customers in countries other than the USA should contact their local dealer or distributor.

INTERNATIONAL DISTRIBUTOR LIST

Argentina

Broni S.A.
Phone: 54 11 4292 3000
FAX: 54 11 4292 4453
J.J. PASO 1260, (1832) LOMAS DE
ZAMORA, BUENOS AIRES

Australia

Steve Cramer Products
Phone: 61 3 9587 1466
FAX: 61 3 9587 2018
39 INDUSTRIAL DRIVE BRAESIDE,
VICTORIA 3192

Austria

Barisitz-Austria
Phone: 43 512 39 22 87
FAX: 43 512 39 45 19
BERNHARD-HOEFELSTRASSE 14,
A-6020, INNSBRUCK

Belgium

Vertex Cycle Systems BV
Phone: 31 23 57 18184
FAX: 31 23 57 18606
FLEMINGSTRAAT 100A, 2041 VL
ZANDVOORT
HOLLAND

Brazil

Pedal Power
Phone: 55 11 3845 6997
FAX: 55 11 3845 6377
R. GOMES De CARVALHO 541
SAO PAULO SO
04547002

Canada

Bell Sports Canada
Phone: 800 661 1662 (Calgary)
FAX: 800 465 4018
BAY 147, 2760 45TH AVE SE
CALGARY, ALBERTA
T2B 3M1

Chile

Bicicletas Belda Limitada
Phone: 56 32 881799
FAX: 56 32 978799
14 NORTE 1001
VINA DEL MAR

Costa Rica

Inversiones Y Sistemas Garvi
Phone: 506 296 3383
FAX: 506 289 7013
P.O. BOX 4805-1000, SAN JOSE

Croatia

Ciklo-Centar
Phone: 385 1 234 22 24
FAX: 385 1 234 34 22
JURJA VES 30A
10000 ZAGREB

Czech Republic

Vanek Praha
Phone: 42 0 312 698 1889
FAX: 42 0 312 698 025
CERRENY UJEZD 185, UNHOST,
27351

Denmark

Duell A/S
Phone: 45 86 36 7800
FAX: 45 86 36 7377
MOLLERUPVEJ 3, TAASTRUP,
8410 RONDE

Ecuador

Bici Sport
Phone: 5932 248737
FAX: 5932 253691
AV DE DICIEMBRE 6327, ENTRE
LOUVRE Y TOMAS DE,
BERLANGA LOCAL #3, QUITO

Estonia

Hawaii Express
Phone: 372 6 398 508
FAX: 372 6 398 566
REGATI 1, 5K-102, TALLINN, 11911,
Estonia
Or
Estonian Unidream
Phone: 372 636 7470
Fax: 372 636 7470
Paavli 2A, Tallinn
EE0004, Estonia

Finland

Mr. Cool OY
Phone: 358 9 3250817
FAX: 358 9 3250609
LINNAVUORENTIE 28, HELSINKI,
00950

France

Royal Velo France
Phone: 33 325 433 730
Fax: 33 325 43 95 95
4 RUE DES AZALEES, P.A. SUD-
CHAMPANGE
ST THIBAUT, 10800

Germany

Sport Import GmbH
Phone: 49 44 05 9280 0
FAX: 49 44 05 9280 49
INDUSTRIESTRASSE 41 B,
EDEWECHT, 26188

Greece

Gatsoulis Stefanos Imports
Phone: 30 12512 779
FAX: 30 12533 960
8 THESSALONIKIS STREET, NEW
FILADELFA, ATHENS, T.T. 14342

Guatemala

BYS Importaciones S.A.
Phone: 502 366 7709
FAX: 502 363 3918
18 CALLE 7-48, ZONA 10,
GUATEMALA

Holland

Vertex Cycle Systems BV
Phone: 31 23 57 18184
FAX: 31 23 57 18606
FLEMINGSTRAAT 100A, 2041 VL
ZANDVOORT
HOLLAND

Hong Kong

Flying Ball Bicycle Company
Phone: 852 23813661
FAX: 852 23974406
201 TUNG CHOI ST. G/F,
MONGKOK KOWLOON

Hungary

Prokoro Ltd Co.
Phone: 361 331 3184
FAX: 361 331 3184
KALMAN IMRE UTCA 23,
BUDAPEST, 1054

Iceland

Orinn Hjól Ltd
Phone: 354 588 9892
FAX: 354 588 9896
SKEIFAN 11, P.O. BOX 8036,
REYKJAVIK

Ireland

Madison
Phone: 44 181 385 3385
Fax: 44 208 345 3443
BUCKINGHAME HOUSE EAST,
THE BROADWAY
STANMORE, MIDDLESEX HA7 4EA
UNITED KINGDOM

Italy

Motorquality
Phone: 39 02 24 951 1
FAX: 39 02 24 951 228
20099 SESTO S. GIOVANNI, (MI) I
VIA VENEZIA, (ANG. VIA
CARDUCCI), MILANO

Japan

Yoshigai Corporation
Phone: 81 729 88 5461
FAX: 81 729 88 5463
5-19, 1-CHOME,
SHIMOROKUMANGI-CHO,
HIGASHI-OSAKA JAPAN 579

Korea

Outdoor International
Phone: 82 2 474 0818
Fax: 82 2 474 0656
3F 379-20 SUNGNAE-DONG,
KANGDONG-KU, SEOUL, 134-030

Latvia

Veloserviss
Phone: 371 750 1292
Fax: 371 750 1298
1/1 HAPSALAS ST., RIGA, LV-1005

Luxembourg

Vertex Cycle Systems BV
Phone: 31 23 57 18184
FAX: 31 23 57 18606
FLEMINGSTRAAT 100A, 2041 VL
ZANDVOORT
HOLLAND

Malaysia

Gin Huat Cycle Trading
Phone: 603 6189 1663
FAX: 603 6189 1662
NO. 8, JALAN INDUSTRI BATU
CAVES ½
TAMAN PERINDUSTRIAN BATU
CAVES
68100 BATU CAVES
SELANGOR DARUL EHSAN

Mexico

Tekno Bike
Phone: 52 8 336 5602
FAX: 52 8 338 5663
HUMBERTO LOBO #780, COL. DEL
VALLE, GARZA GARCIA, MEXICO,
CP, 66220, Mexico

New Zealand

W.H. Whorrall & Co. Ltd.
Phone: 64 9 63 6 06 41
FAX: 64 9 63 6 06 31
43 FELIX ST
PENROSE, AUCKLAND
NEW ZEALAND

Norway

Hallman Sports
Phone: 46 18 56 16 00
FAX: 46 18 50 03 22
HALLNASGATAN 8, S-75228
UPPSALA, SWEDEN

Panama

Distribuidora Rali S.A.
Phone: 507 220-3844
FAX: 507 220-5303
VIA ESPANS EDIFICA CARCEP,
P.O. BOX 87-0852, PANAMA 7

Peru

Rojo Sports
Phone: 511 447 0838
FAX: 511 447 0838
AV. REPUBLICA DE, PANAMA 6513,
LIMA 33

Poland

Giant Polska S.P. ZOO
Phone: 48 22 645 14 34
FAX: 48 22 645 14 36
AL NIEPODLEGLOSCI 221-4, 02-
087 WARSZAWA

Portugal

Bicimax
Phone: 351 244 553276
FAX: 351 244 553187
APARTADO 34, 2431 MARINHA
GRANDE

Russia

Sportex
Phone: 7095 288 4524
FAX: 7095 288 6888
KUDRINSKAYA PL., 1,, P.O.BOX 33,
MOSCOW, 123242

St. Maarten

Tri-Sport International
Phone: 5995 43462
FAX: 5995 43928
8 AIRPORT BOULEVARD,
SIMPSON BAY, NAMIBIA

Singapore

Trekology Bikes 3
Phone: 65 466 2673
FAX: 65 466 7610
24 HOLLAND GROVE ROAD,
SINGAPORE, 1545

Slovak Republic

Paul Lange Oslany
Phone: 42 1 862 5492 344
FAX: 42 1 862 5492 350
MIEROVA 854/37 OSLANY, 97247
SLOVAKIA

Slovenia

Proloco Trade
Phone: 386 64 380 200
FAX: 386 64 380 2022
ENOTA KRANJ, BRITOF 96A, 4000
KRANJ

South Africa

Coolheat (SA) (PTY) Ltd.
Phone: 27 11 807 5282
FAX: 27 11 807 2998
3 RUARGH STREET, PARK
CENTRAL, P O BOX 740,
JOHANNESBURG 2001

Spain

K. Motor Dealer S.L.
Phone: 34 9 1 637 70 97
FAX: 34 9 1 637 72 64
PARQUE INDUSTRIAL,
EUROPOLIS EDIFICIO BRUSELA,
BLOQUE 4, NAVE 1, LAS ROZAS
(MADRID), N/A, 28230

Sweden

Hallman Sports
Phone: 46 18 56 16 00
FAX: 46 18 50 03 22
HALLNASGATAN 8, S-75228
UPPSALA

Switzerland

Cilo Bike Service SA
Phone: 41 21 641 63 30
FAX: 41 21 641 63 82
CH. DE L'ORIO 30 A, CASE
POSTALE 64, CH- 1032
ROMANEL S. LAUSANNE

Taiwan

Biketech Co. Ltd.
Phone: 886 22 694 5806
FAX: 886 22 694 6133
NO. 12 FU TEH ROAD, 266 LANE,
37 ALLEY HSICHIH, TAIPEI HSIEN,
TAIWAN, R.O.C.

Thailand

Probike Co. Ltd.
Phone: 662 254 1077
FAX: 662 254 1078
237/2 SARASIN ROAD, LUMPINNE,
PATUMWAN, BANGKOK, 10330

Turkey

EBSAT
Phone: 90 212 514 0525
FAX: 90 212 519 4846
EBSAT EMEK BISIKLET,
EBUSSUUD CAD NO.67, 34410
SIRKECI, ISTANBUL, 34410

United Kingdom

Madison
Phone: 44 181 385 3385
Fax: 44 208 345 3443
BUCKINGHAME HOUSE EAST,
THE BROADWAY
STANMORE, MIDDLESEX HA7 4EA
UNITED KINGDOM

Venezuela

Bike Sports
Phone: 582 751 9709
FAX: 582 753 5071
CENTRO COMERCIAL IBARRA,
PLANTA BAJA, LOCAL 3-A CALLE
GARCILAZO, COLINAS DE BELLO,
0, CARACAS

950-006074-00, Rev. A01

March 2001



**1610 Garden of the Gods
Colorado Spring, CO 80907**

IMBA Rules of the Trail

Ride on open trails only
Leave no trace
Control your bicycle
Always yield trail
Never spook animals
Plan ahead